

DrySnap® Under Deck Rain Carrying System


See page 61 for product ordering information.

The **DrySnap®** system is an easy way to create a great outdoor space under residential and light commercial decking.*

Its five components snap together for maximum efficiency and cost savings.

Warning:

Barbeque grills, portable propane heaters, fire pits and outdoor fireplaces should not be used under the living space protected by **DrySnap®**. Heat generated from these devices can damage the **DrySnap®**.

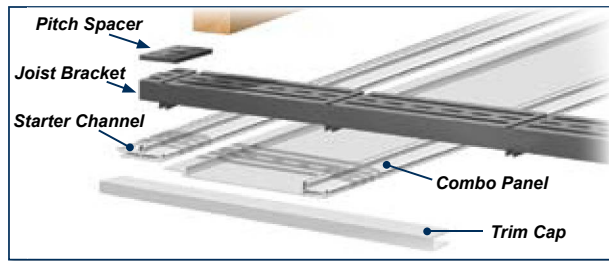

Step #1
Screw joist brackets with pitch spacers attached into joist. Use #8 zip screws (sold separately) to attach dovetail connections.



Step #2
Snap starter channel to joist bracket.



Step #3
Snap panels into place and finish with trim cap.



Component Calculations What Do You Need To Buy?

| Deck Size | | | Combo Panel | Starter Channel | Trim Cap | Joist Bracket | Pitch Spacers 32/bag | 2.5" Screws 50/packs | 3" Screws 50/packs | 6½" Gutter Screws & Ferrules, 10/pack | Zip Screws | | |
|-----------|-------|--------|----------------|-----------------|----------------|----------------|----------------------|----------------------|--------------------|---------------------------------------|------------------|------------------------|------------------------|
| Width | Depth | Sq.Ft. | Part No. 37324 | Part No. 37325 | Part No. 37320 | Part No. 37321 | Part No. 37331 | Part No. 37341 | Part No. 37351PK | Part No. 84178PK | Part No. 84179PK | Part No. 84181PK | Part No. 84182 |
| | | | Pkg.qty 12 | Pkg.qty 9 | Pkg.qty 12 | Pkg.qty 12 | Pkg.qty 12 | Pkg.qty 36 | Pkg.qty 12 bags | Pkg.qty 8/ctn | Pkg.qty 8/ctn | Pkg.qty 12/pack-10/ctn | Pkg.qty 40/pack-25/ctn |
| | | | 12 ft. Pcs. | 16 ft. Pcs. | 12 ft. Pcs. | 16 ft. Pcs. | 12 ft. Pcs. | Pcs. | Bags | Screws | Screws | Gutter Screws | Zip Screws |
| 10' | 10' | 100 | 15 | - | 1 | - | 3 | 36 | 5 | 1 | 1 | 1 | 1 |
| 12' | 10' | 120 | 18 | - | 1 | - | 3 | 42 | 5 | 1 | 1 | 1 | 2 |
| 16' | 10' | 160 | 24 | - | 1 | - | 4 | 54 | 6 | 1 | 1 | 1 | 2 |
| 20' | 10' | 200 | 30 | - | 1 | - | 4 | 66 | 8 | 1 | 1 | 1 | 2 |
| 12' | 12' | 144 | 18 | - | 1 | - | 3 | 49 | 7 | 1 | 1 | 1 | 2 |
| 16' | 12' | 192 | 24 | - | 1 | - | 4 | 63 | 7 | 1 | 1 | 1 | 2 |
| 20' | 12' | 240 | 30 | - | 1 | - | 4 | 77 | 11 | 2 | 2 | 1 | 2 |
| 24' | 12' | 288 | 36 | - | 1 | - | 4 | 91 | 13 | 2 | 2 | 1 | 3 |
| 12' | 14' | 168 | - | 19 | - | 1 | 4 | 56 | 9 | 1 | 1 | 1 | 2 |
| 16' | 14' | 224 | - | 25 | - | 1 | 4 | 72 | 12 | 1 | 1 | 1 | 2 |
| 20' | 14' | 280 | - | 31 | - | 1 | 4 | 88 | 14 | 2 | 2 | 1 | 3 |
| 24' | 14' | 336 | - | 37 | - | 1 | 5 | 104 | 17 | 2 | 2 | 1 | 3 |
| 12' | 16' | 192 | - | 19 | - | 1 | 4 | 63 | 12 | 1 | 1 | 1 | 2 |
| 16' | 16' | 256 | - | 25 | - | 1 | 4 | 81 | 15 | 1 | 1 | 1 | 3 |
| 20' | 16' | 320 | - | 31 | - | 1 | 5 | 99 | 18 | 2 | 2 | 1 | 3 |
| 24' | 16' | 384 | - | 37 | - | 1 | 5 | 117 | 22 | 2 | 2 | 1 | 3 |

For custom deck sizes, gutter installation guidelines, fan/light installation instructions, go to DrySnap.com.

For caulking seams, we recommend Amerimax FlashMate®.

*Standard code approved decking is less than 30 ft. above ground.