

Gutter Shingle

Helps Keep Leaves and Debris Out of Gutters.

- Fine mesh screen helps block small debris
- Textured paint blends with the shingles
- Contractor quality with simple installation
- Can be installed on any pitch roof

Installation

Thoroughly clean gutter and downspout of any debris before beginning installation.

Tools that may be required:

- Tin snips or hacksaw to miter cut corners and cut pieces to length
- Pliers to bend the lip of the gutter around gutter spikes
- Power screw driver




Step 1 Starting at one end of the gutter, slightly lift the first row of shingles and slide the back edge of the gutter cover under the shingles (Fig. A), then pull the front edge of The Gutter Shingle forward so that it clips to the front edge of the gutter. (Fig. B) Note: If there is not enough space between the gutter lip and spike, you will need to bend the lip up a little or pinch the lip closed to allow the clip to fit over the lip. (Fig. C)

Step 2 If the roof shingles do not cover the back edge of gutter cover by at least one inch, it will be necessary to screw The Gutter Shingle to the front of the gutter using a sheet metal screw. (Fig. D)

Step 3 Install the next section using the same process as step 2. The notched clip will allow each section to overlap creating a seamless run of The Gutter Shingle.

Step 4 To fit outside corners, miter cut opposite ends of the two adjoining pieces to form a corner point (Fig. E). Note: To get an accurate cut, you should mark the cut with The Gutter Shingle in place on the gutter and roof. This will give the proper angle to miter cut each section.

Step 5 For inside corners, a small section of 1/4" mesh gutter guard (Lock-On or Hinged) may be required in the gutter where the roof valleys flow into the gutter and where upper roof downspouts flow into lower gutter.

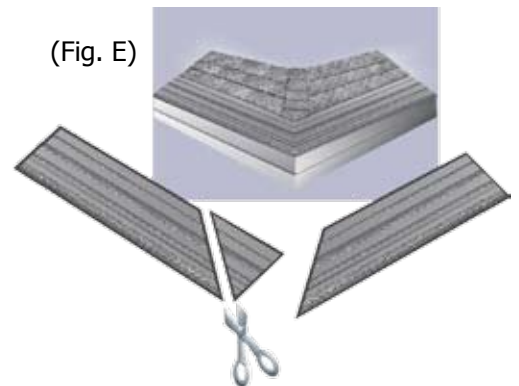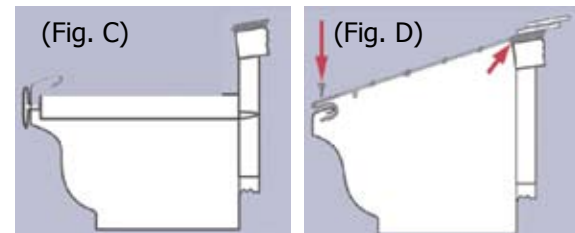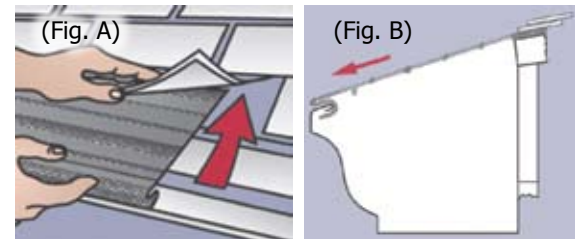

Call today to find out more about Amerimax's full line of rain carrying products and accessories! 800-347-2586